

MODEL	A	B	DEPTH
TM-2	4.125	3.187	1.75
NOTE: ALL DIMENSIONS IN INCHES.			

## TIMER MODEL - TM-2 MULTI-FUNCTION


### Features

- Industrial quality Multi-Function timer
- Operates on 12 or 24 VDC or VAC
- 5 Amp DPDT relay
- Dip switches select exact delay times
- Delay Times of 1 to 255 seconds or minutes
- Seven operating modes
- Trigger can be from a N/O or a N/C switch

**Operating Temperatures**  
**0 to 43C [32 to 110F]**

### How to Order

<u>Part #</u>	<u>Description</u>
<b>TM-2</b>	Time Master II Multi-Function Timer

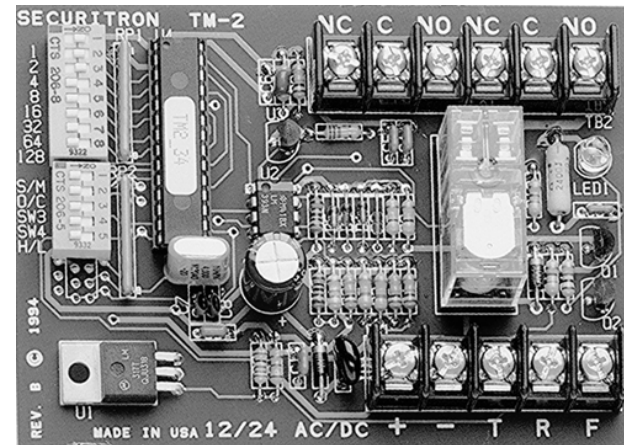

## **TIMER MODEL - TM-2 MULTI-FUNCTION (cont'd)**

### **Architectural Specifications**

- A. The Timer shall be produced by an ISO 9001 certified manufacturer.
- B. The timer shall operate on 12 or 24 volts AC or DC
- C. The Timer shall have a 5 Amp rated DP/DT dry contact output.
- D. The timer shall have multiple DIP switch programmable functions (i.e. on delay, triggered on delay, off delay, one shot, pulse output, toggle mode, and cyclic mode).
- E. Delay times shall be set in seconds or minutes with a maximum setting of 255 minutes and a minimum setting of 1 second.