

SECURITRON SYSTEM # 02

Application

Any monitored access controlled door with a cylindrical latch set with store room function.

Operation

Outside Operation: From outside the door is locked by the cylindrical latch set and access is via the DK-26 digital entry system.

Inside Operation: From inside the door is locked by the cylindrical latch set approaching the door activates the XMS exit motion sensor shunting the alarm panel and egress is made by turning the door handle.

Alarm monitoring is accomplished with MSS-1C high security door position.

Securiton System Components

1 each	XMS
1 each	UNL-24
1 each	DK-26
1 each	MSS-1C
1 each	Power Supply BPS-24-1
1 each	Battery B-24-5

Additional Components Required

	Hinges
1 each	Closer
1 each	Kickplate
1 each	Stop
	Gasketing (as required)


Options

- 1) For mortise locks use the MUNL-24.

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR WITH CYLINDRICAL LATCH SET AND MONITORING POINT TO POINT	Revision: 1	Number of Pages: 3	DRAWING # SEC-2	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 1		Approved By: RSALAZAR

SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
Website: www.securitron.com E-mail: info@securitron.com

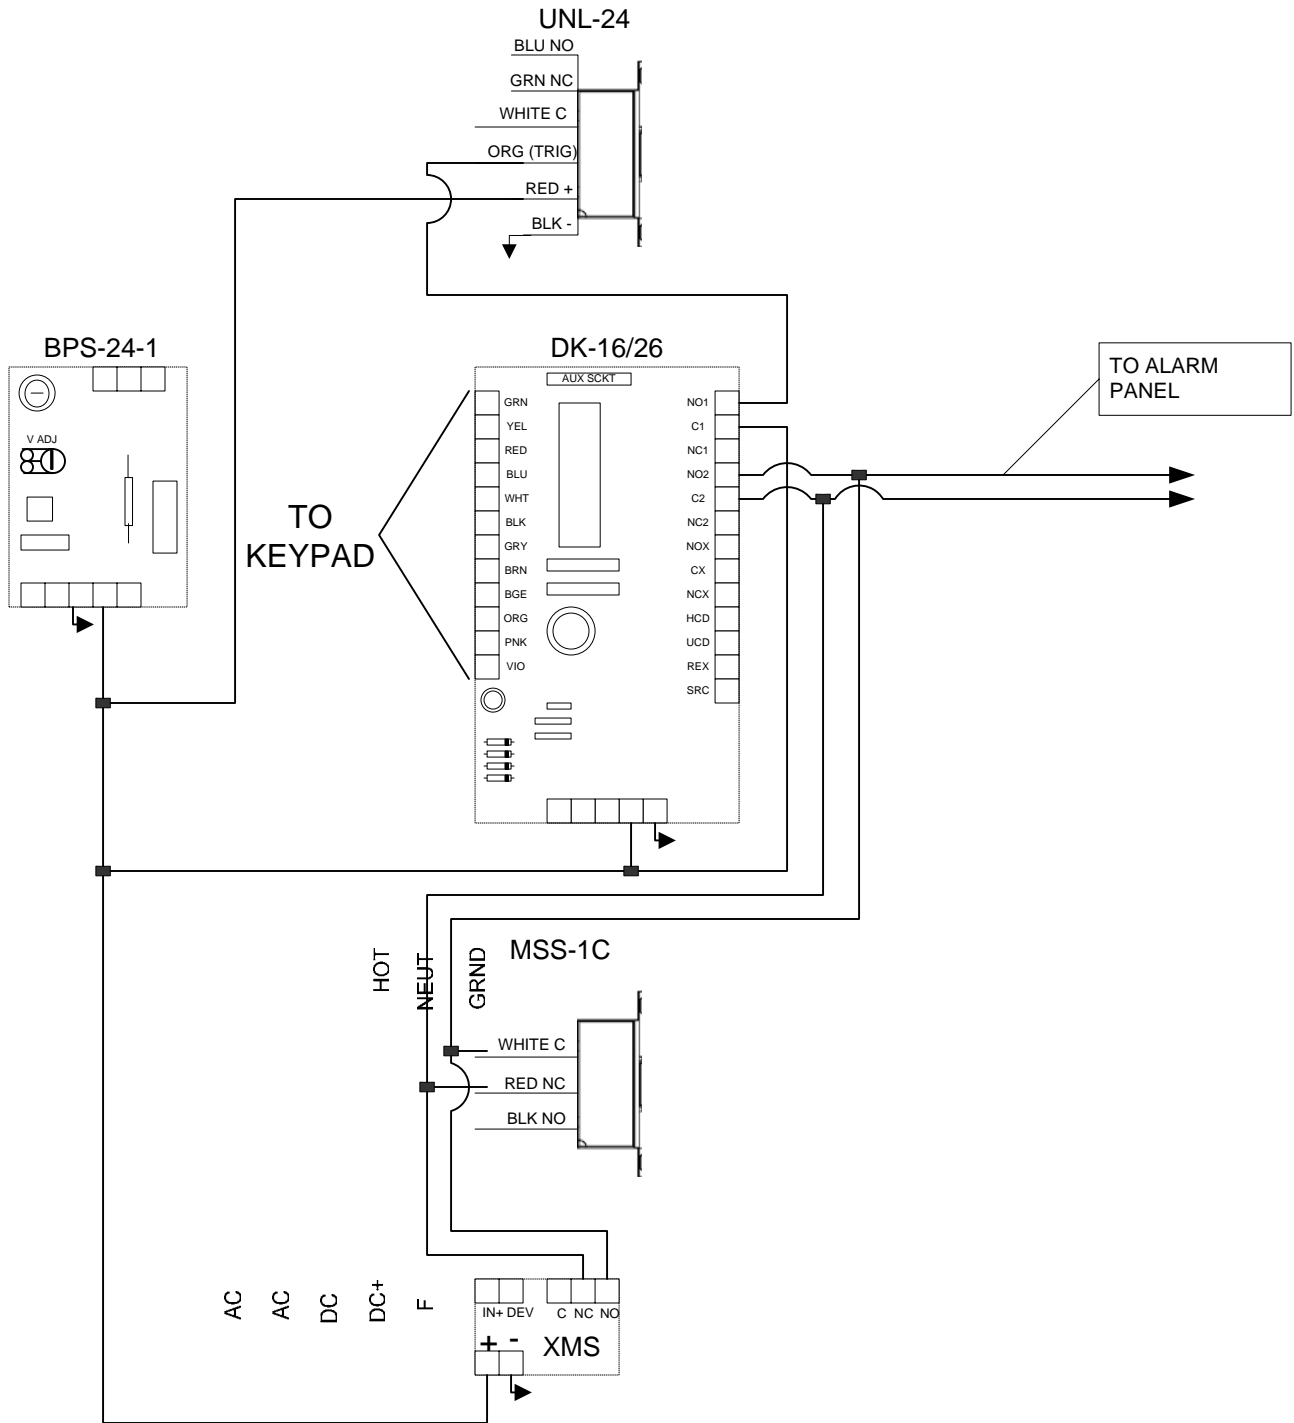


MICROPROCESSRO

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR WITH CYLINDRICAL LATCH SET AND MONITORING POINT TO POINT	Revision: 1	Number of Pages: 3	DRAWING # SEC-2	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 2		Approved By: RSLAZAR

SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
 Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
 Website: www.securitron.com E-mail: info@securitron.com

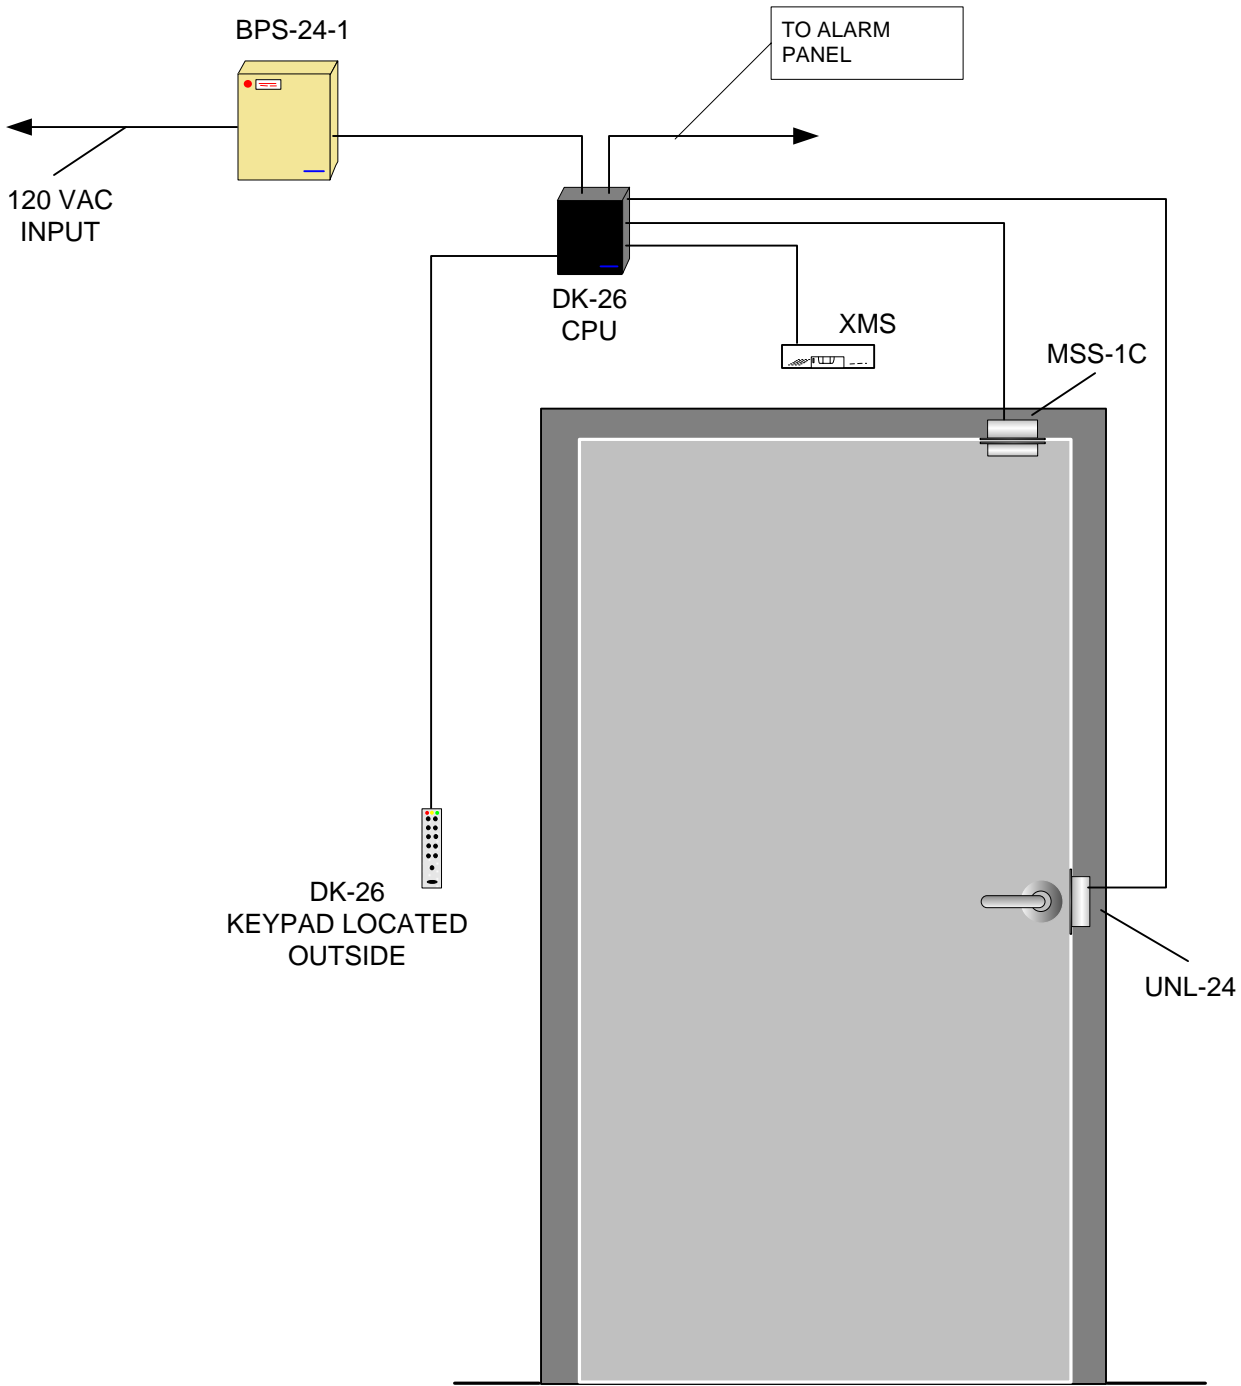

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR WITH CYLINDRICAL LATCH SET AND MONITORING POINT TO POINT	Revision: 1	Number of Pages: 3	DRAWING # SEC-2	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 3		Approved By: RSALAZAR

SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
 Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
 Website: www.securitron.com E-mail: info@securitron.com