

Securitron® DK-16 Digital Keypad System

*Secure, easy-to-program,
single-door control system*



The DK-16 digital keypad system provides medium/high security control of electric locks in a one- or two-door application where both doors have the same control needs.

The tamper-resistant keypad provides true 10-key operation for use and programming. Encased in a separate enclosure for secure installation in a protected area, the controller offers REX input and relay output for lock control, alarm shunt or other interfaces.


Features

Standard Features



- 12-key keypad with engraved and paint filled numbers
- Stainless steel plate
- Red, green and yellow LEDs for status and programming feedback
- Audible keystroke echo
- True 10-key operation (keys are not paired)
- 59 users with multiple entry codes
- User code and hard code disable feature
- Passage Mode and Lockout Mode
- Request to exit (REX) input
- 16 ft. [4.8m], 12 conductor, 22 gauge keypad cable
- 3 LEDs and a bell button
- US32D/630 Satin Stainless Steel finish
- MagnaCare® lifetime replacement, no fault, no questions asked warranty

Accessories

- **WCC** Weather-resistant cover
- **WBB** Weather-resistant back box
- Keypad available as system or separately

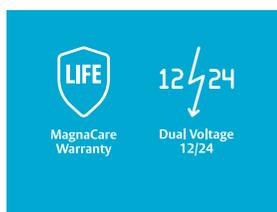

Dimensions

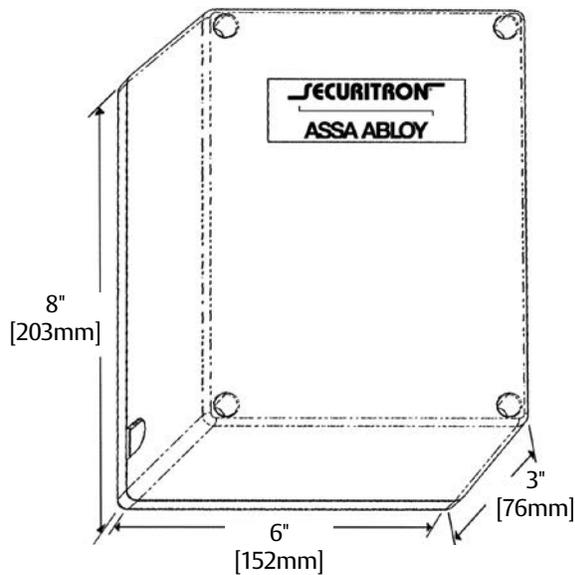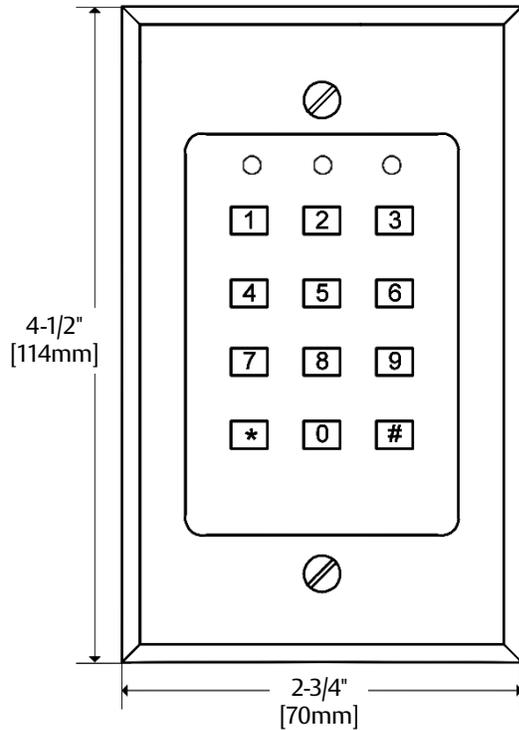

Specifications

Dimensions

- **Keypad:** 2-3/4"W x 4-1/2"H x 5/32"D
- **Enclosure:** 6"W x 8"H x 3"D

Electrical

- **12 VAC/VDC:** 7 mA at rest; 160 mA active
- **24 VAC/VDC:** 20 mA at rest; 190 mA active

Operating Temperature

- **CPU:** +32 to +158F [0 to +70C]
- **Keypad:** +32 to +110F [0 to +43C] Indoor use

Shipping Weight

- **Keypad and Controller:** 2.8lbs [1.25kg]

Need an Outdoor Solution?



WCC



WBB

WCC and WBB allow DK-12 to be mounted in outdoor locations not directly exposed to rain or snow

How to Order

Model Series	Special Feature
DK-16	P
DK-16 Keypad	P Keypad only