


# M38 Series Magnalock®

600 lbs holding force,  
bracket mounted Magnalock

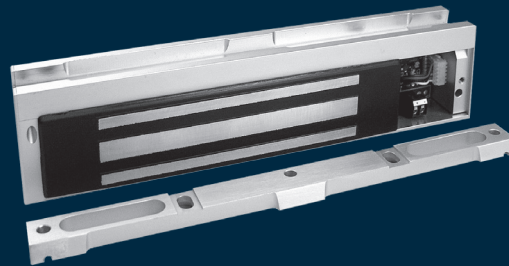

Easily installed,  
bracket mounted  
Magnalock for interior  
applications.

The M38 electromagnetic lock is ideal for traffic control in high-use areas within secured or monitored perimeters. Offerings include solutions for interior rooms, closets and hallways where reliability, high durability and low maintenance are required. Bracket mounting and wiring chamber provide quick, accurate installation.

## Features

### Standard Features

- Automatic dual-voltage  
—no field adjustment required
- Bracket mounting provides the easiest install for out-swing doors
- Rust resistant—all ferrous metal surfaces plated for durability
- Instant release circuit  
—no residual magnetism
- Internal wire access chamber
- Noise suppression with included MOV
- Ultra-secure collapsing blind nuts mount to door frame for strength and reliability
- MagnaCare® lifetime replacement, no-fault, no questions asked warranty

### Optional Features

- **D** Integrated Door Position Switch (DPS)
- **L** LED indicator
- **T** Anti-tamper switch



Grade 3



MagnaCare  
Warranty



Auto Sensing  
Dual Voltage  
12/24



Fire Rated



Preload

## Specifications

### Certifications

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA A156.23, Grade 3; E18501-500 Compliant
- CSFM—California State Fire Marshal Approved
- CE:EN 50081-1(92), EN 61000-6-2(99) Approved

### Electrical

- 325 mA at 12 VDC
- 175 mA at 24 VDC

### Holding Force

- 600 lbs [272kg]



### Operating Temperature

- 32° to 110°F [0° to 43°C]
- Indoor use only

### Shipping Weight

- 8 lbs [3.63kg]

## Dimensions

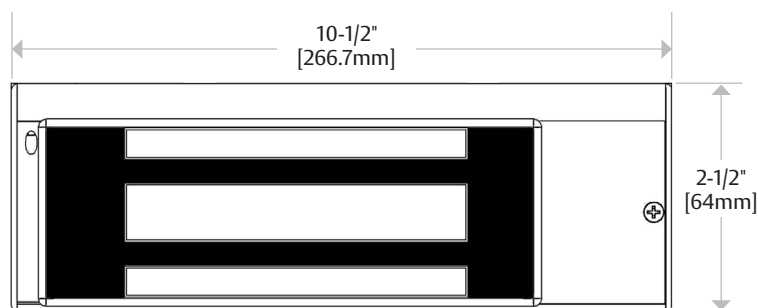

## How to Order

MODEL SERIES	MONITORING OPTIONS
<b>M38</b>	<b>DLST</b>
M38 600lbs Magnalock	(blank) No Monitoring
	D Door Position Switch
	L LED Indicator
	T Tamper Monitor

