

SECURITRON SYSTEM # 05

Application

Single door exit delay system with door movement initiate, digital access / egress and key switch reset.

Operation

Outside Operation: From the outside the door is secured via the M62B Magnalock, entry of a valid code on the DK-26 allows access to the secure area and shunts the exit delay system as well as the alarm contacts.

Inside Operation: The door is secured via the M62B Magnalock, egress without alarm is accomplished via entry of a valid code on the DK-26. Emergency egress is accomplished by actuating the MXD-62 and waiting for the 15 second release delay period. System reset is via the MK key switch.

Securitron System Components

1 each	Magnalock M62B
1 each	DK-26 Digital Entry System
1 each	MXD-62 Door Movement Exit Delay Initiate
1 each	BA-XDT-24 Exit Delay Timer in Flush Enclosure
1 each	MK Mortise Key Switch
1 each	Power Supply BPS-24-1
1 each	Battery B-24-5

Additional Components Required


	Hinges
1 each	Closer
1 each	Kickplate
1 each	Stop
	Gasketing (as required)

Options

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR EXIT DELAY WITH DOOR MOVEMENT INITIATE, DIGITAL ACCESS/ EGRESS AND KEY SWITCH RESET	Revision: 1	Number of Pages: 3	DRAWING # SEC-5	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 1		Approved By: RSALAZAR


SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
Website: www.securitron.com E-mail: info@securitron.com

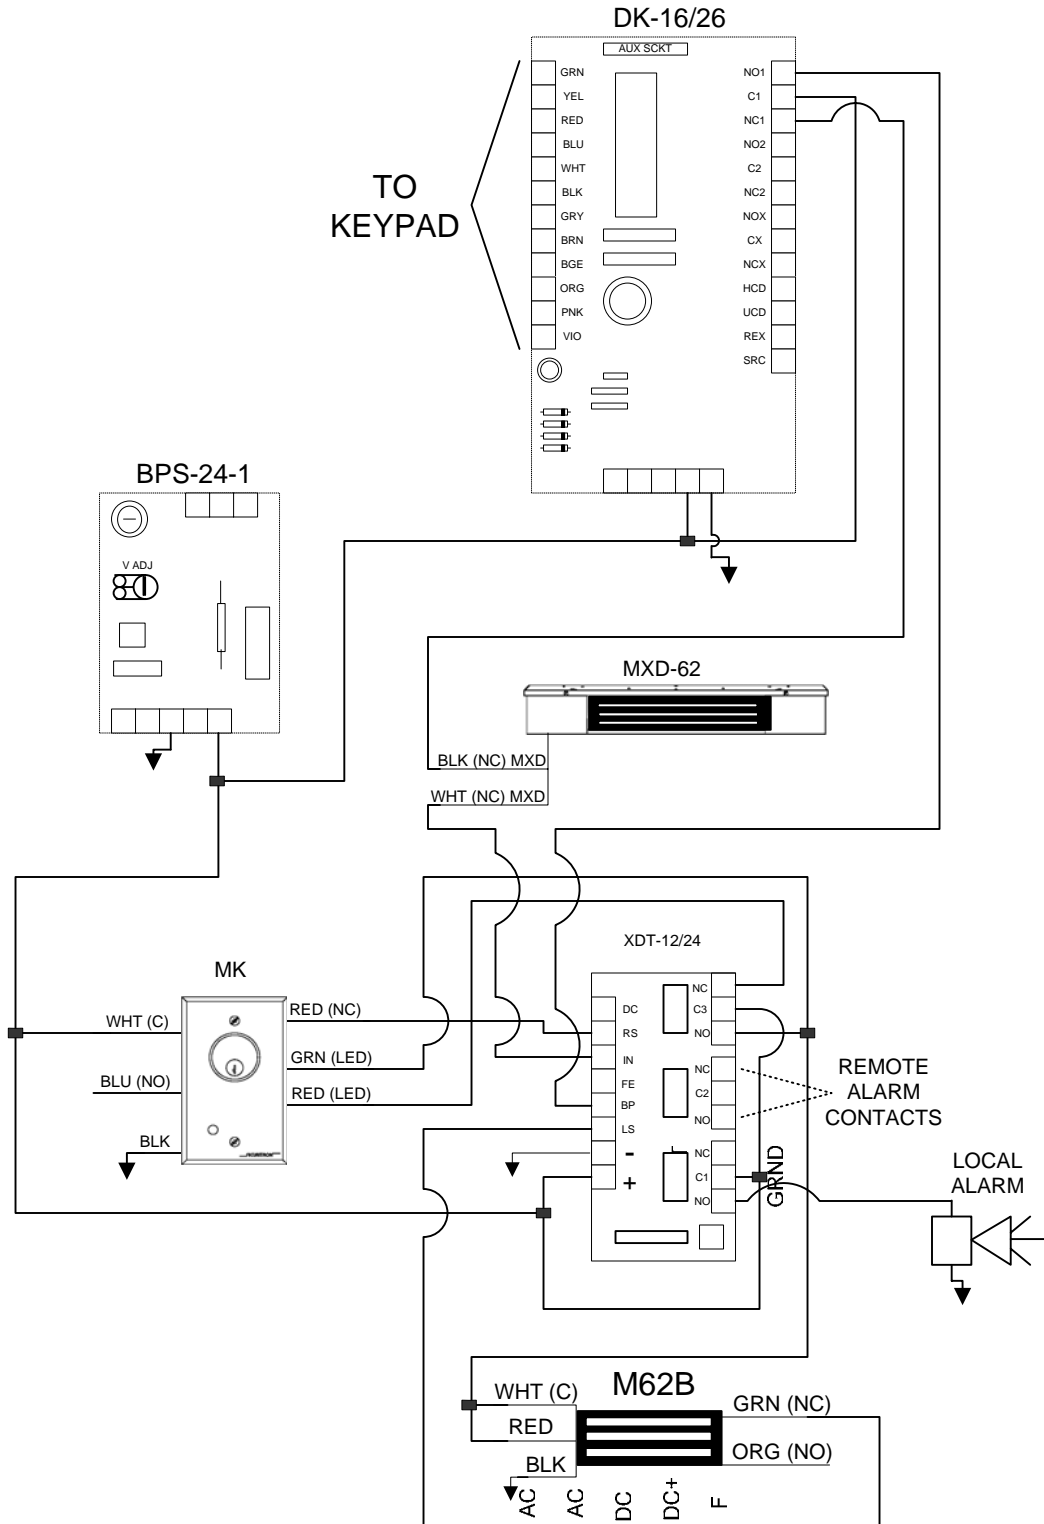

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR EXIT DELAY WITH DOOR MOVEMENT INITIATE, DIGITAL ACCESS/ EGRESS AND KEY SWITCH RESET POINT TO POINT	Revision: 1	Number of Pages: 3	DRAWING # SEC-5	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 1		Approved By: RSALAZAR

SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
 Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
 Website: www.securitron.com E-mail: info@securitron.com

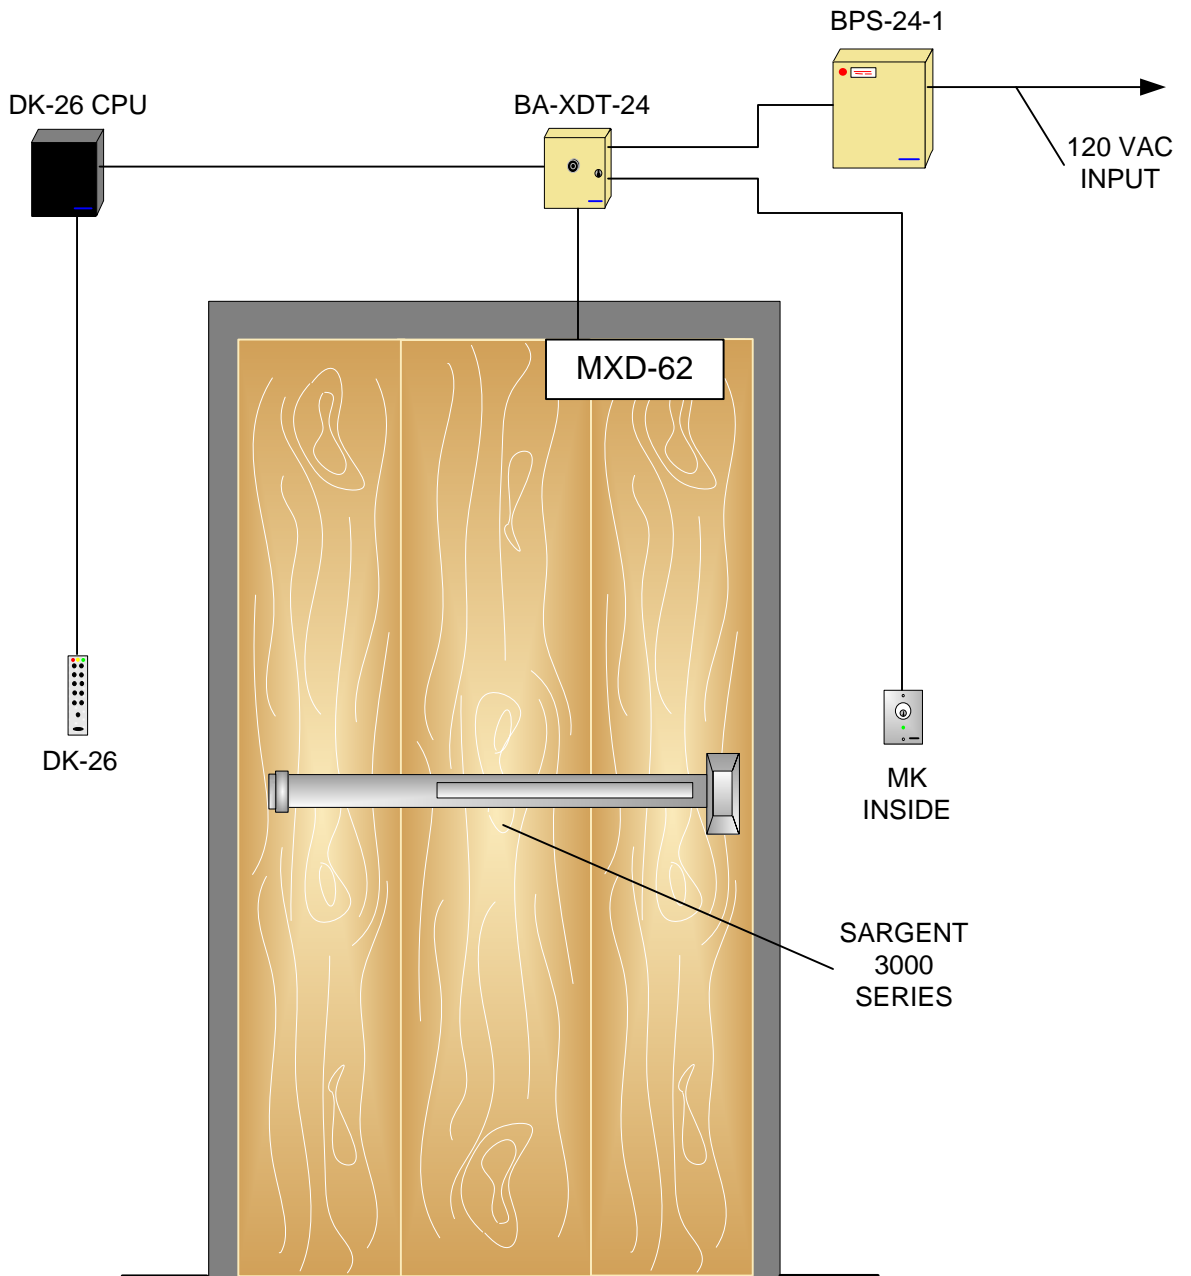

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR EXIT DELAY WITH DOOR MOVEMENT INITIATE, DIGITAL ACCESS/ EGRESS AND KEY SWITCH RESET RISER	Revision: 1	Number of Pages: 3	DRAWING # SEC-5	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 3		Approved By: RSALAZAR

SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
 Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
 Website: www.securitron.com E-mail: info@securitron.com