

SECURITRON SYSTEM # 09

Application

Any exterior door where controlled access and free egress is required and there is a concern that the door might be blocked open against the will of the building owner or tenants. (i.e. secured parking, apartment and dorm buildings)

Operation

Outside Operation: The outside door is closed and locked by the M62B Magnalock. Entering an authorized user code on the keypad (or other switching device) will de-energize the lock and allow access.

Inside Operation: The door is normally closed and lock by the M62 Magnalock, activation of the TSB-3 Touch Sense Bar will de-energize the lock and allow egress. If the door is blocked or held open for longer than the time pre-set on the Door Prop Alarm BA-DPA-24 (30ses, 60sec, 120sec or 240sec.) an alarm will sound. The alarm will silence once the door is secured.

Securitron System Components

1 each	Magnalock M62B
1 each	Digital Keypad DK-26
1 each	Touch Sense Bar TSB-3CL
1 each	Door Prop Alarm BA-DPA-24
1 each	Power Supply BPS-24-1
1 each	Battery B-24-5

Additional Components Required

	Hinges
1 each	Closer
1 each	Kickplate
1 each	Stop
	Gasketing (as required)


Options

- 1) For doors requiring card access or key access, replace the keypad with the card reader or key switch of your choice.

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR ACCESS / EGRESS WITH DOOR PROP ALARM	Revision: 1	Number of Pages: 3	DRAWING # SEC-9	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 1		Approved By: RSALAZAR


SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
Website: www.securitron.com E-mail: info@securitron.com

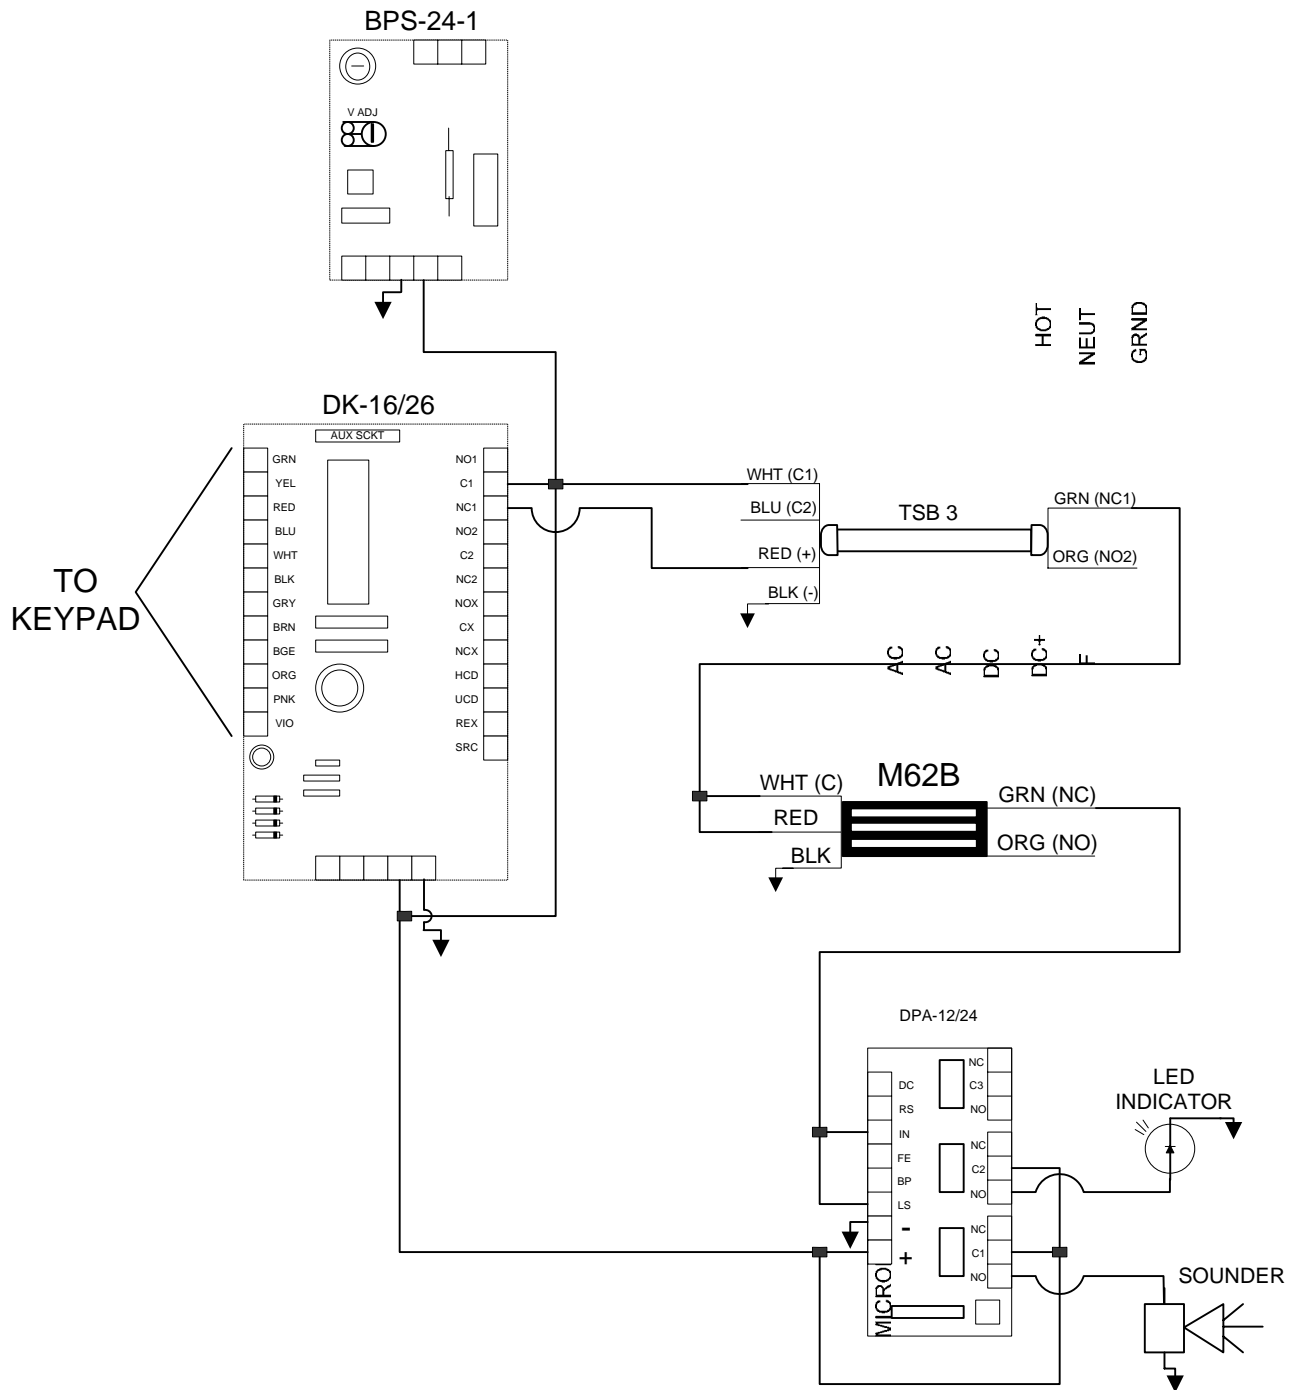

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR ACCESS / EGRESS WITH DOOR PROP ALARM POINT TO POINT	Revision: 1	Number of Pages: 3	DRAWING # SEC-9	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 2		Approved By: RSALAZAR

SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
 Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
 Website: www.securitron.com E-mail: info@securitron.com

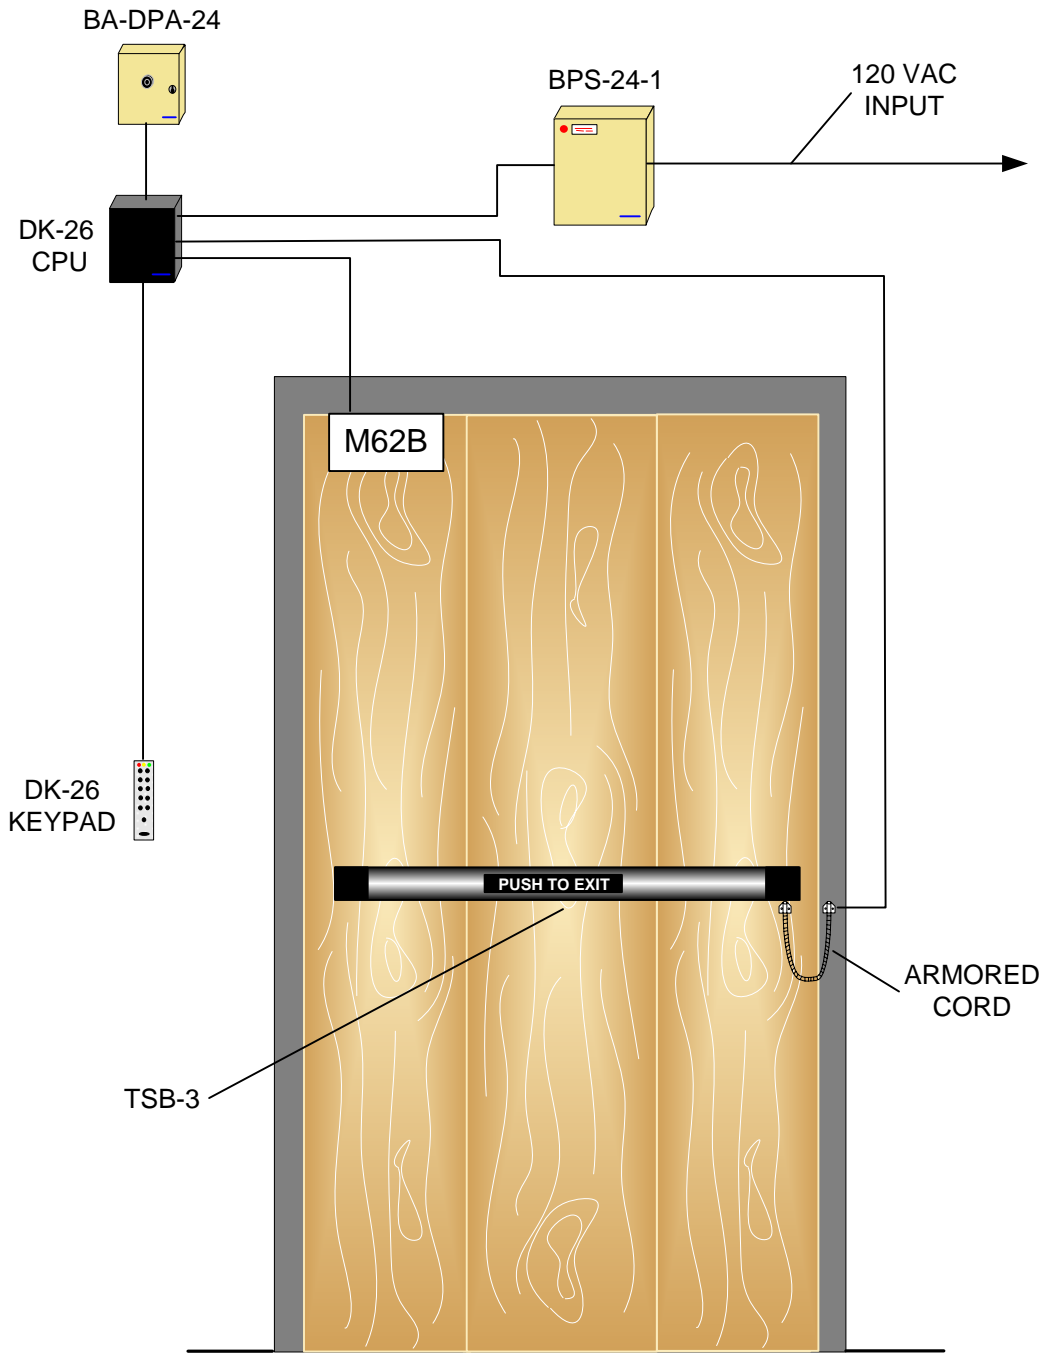

COMMENTS: MOST DEVICES COME WITH WIRE LEADS IN DIFFERENT LENGTHS DEPENDING ON WHAT MODEL IT IS. IF LONGER WIRE RUNS ARE REQUIRED 18G STRANDED WIRE IS FINE FOR SHORTER WIRE RUNS ON A 12 V SYSTEM. 22G WIRE IS ACCEPTABLE FOR SHORTER WIRE RUNS ON A 24 V SYSTEM. FOR SPECIFIC WIRE GAUGE QUESTIONS ON LONGER RUNS OR SYSTEMS PLEASE CALL OUR TECH SUPPORT LINE AT 1-800-MAGLOCK OR 1-800-624-5625.

SINGLE DOOR ACCESS / EGRESS WITH DOOR PROP ALARM RISER DIAGRAM	Revision: 1	Number of Pages: 3	DRAWING # SEC-9	Drawn By: EBERGERET
	Date: 4-23-04	Page Number: 3		Approved By: RSALAZAR

SECURITRON MAGNALOCK CORP., 550 Vista Blvd., Sparks NV 89434 USA
 Tel: (775) 355-5625 (800) MAGLOCK Fax: Mkt. (775) 355-5636, Fax: Admin. (775) 355-5633
 Website: www.securitron.com E-mail: info@securitron.com